

NEF

N45 MNA

FOR INDUSTRIAL APPLICATIONS

4 CYLINDERS IN LINE - DIESEL CYCLE

60 kW (81 CV) @ 2300 rpm

320 Nm @ 1400 rpm



T E C H N O L O G I C A L E X C E L L E N C E

**IVECO
MOTORS**

N45 MNA FOR INDUSTRIAL APPLICATIONS

Technical code		F4GE0404A *D6..
Thermodynamic cycle		Diesel 4 stroke - D.I.
Air intake		NA
Arrangement		4L
Bore x Stroke	mm	104 X 132
Total displacement	l	4.5
Valves per cylinder		2
Cooling		liquid
Direction of rotation (viewed facing flywheel)		CCW
Compression ratio		17.5 : 1
Rotation mass moment of inertia (without flywheel)	kgm ²	0.19
Standard flywheel inertia	kgm ²	0.69

Air induction

Max suggested intake restriction with clean air filter	kPa(bar)	3.5 (0.035)
Max allowable restriction with dirty air filter	kPa(bar)	6.5 (0.065)
Air requirement for combustion at 100% load/rated speed	kg/h (m ³ /h)	328 (280)
Turbocharging pressure at full load/rated speed	kPa(bar)	-
Turbocharging air max temperature (engine inlet)	°C	-
Heat rejected to intercooler at maximum power	kJ/s(kcal/h)	-
Intercooler system max pressure drop	kPa(bar)	-

Exhaust system

Max allowable backpressure	kPa(bar)	10 (0.1)
Max exhaust temperature at full load/rated speed	°C	625
Exhaust flow at max output	kg/h	345

Lubrication system

Minimum oil pressure at idle	kPa(bar)	70 (0.7)
Max oil temperature at full load/rated speed	°C	120
Engine angularity limits continuous operation: max front up and front down	0/360	35
max left hand and right hand	0/360	35
Total system capacity including pipes, filters etc.	liters	12.8

Cooling system

Coolant capacity (engine only)	liters	8.5
Water pump flow at rated speed	m ³ /h	9.5
Heat to reject by heat exchanger at max power	kJ/s(kcal/h)	38.5 (33,000)
Thermostat (modulating range)	°C	83 ÷ 95
Cooling liquid max temperature	°C	103
Min/max inner pressure in the cooling circuit	kPa(bar)	30/100 (0.3/1)
External cooling system max pressure drop	kPa(bar)	35 (0.35)

Fuel system

Injection system		Rotary pump
Gas oil max intake restriction	kPa(bar)	15 (0.15)
Gas oil max intake temperature	°C	60 (at 25°C amb.)

Electrical system

Voltage	V	12
---------	---	----



N45 MNA FOR INDUSTRIAL APPLICATIONS

Maximum rating *	kW(CV)	60 (81)
At speed	rpm	2300
Maximum torque	Nm(kgm)	320 (33)
At speed	rpm	1400
Maximum no load governed speed at max rating	rpm	2480
Minimum idling speed	rpm	650
Mean piston speed at rated speed	m/s	10.1
BMEP at max torque	kg/cm ²	9.1
Available certifications		EC 97/68 Phase 2 - EPA Tier 2
Specific fuel consumption at full load (best value)	g/kWh @ rpm	230 @ 1400
Oil consumption at max rating	(% of fuel consumption)	0.1
Noise at max rating (ISO 3744)	dBA	92
Minimum starting temperature without auxiliaries	°C	-15
Oil and oil filter maintenance interval for replacement	hours	500
Dry weight (standard configuration)	kg	380

FOR INFORMATION ON THE AVAILABLE RATINGS NOT LISTED IN THIS DOCUMENT PLEASE CONTACT THE IVECO MOTORS SALES NETWORK.

* **Power** at flywheel according to 97/168 EC (without fan), after 50 hours running, 3% tolerance, fuel Diesel EN 590

Test conditions : ISO 3046/1, 25 °C air temperature, 100 kPa atmospheric pressure, 30 % relative humidity - Applicable also to DIN 6271, BS 5514, SAE J1349 Standards.

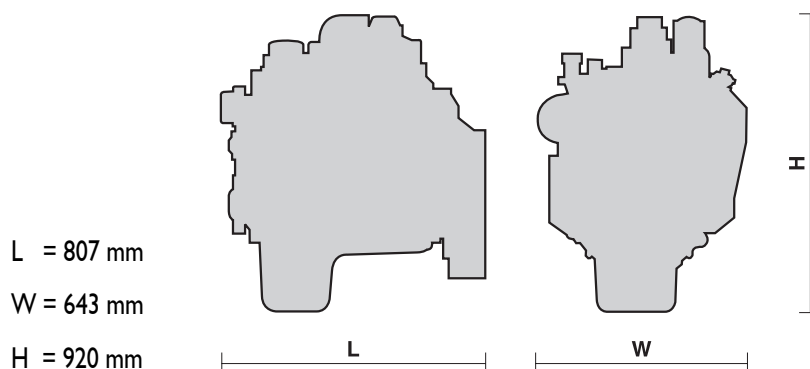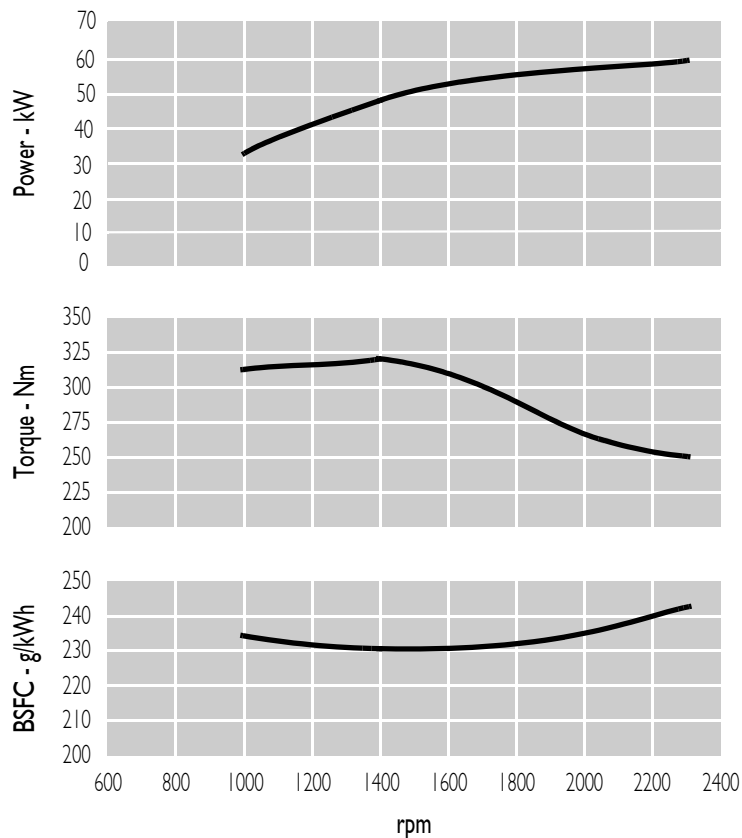

N45 MNA FOR INDUSTRIAL APPLICATIONS

Standard configuration

Flywheel housing	SAE	3
Flywheel size	inch	10
Intake manifold location		left side / backward inlet
Exhaust manifold location		right side / upward outlet
Turbocharger		-
Turbocharger location		-
Fan transmission ratio		1.41 : 1
Distance between fan - crankshaft centers	mm	296
Fuel filter	n°	1 - left side
Fuel prefilter		-
Fuel pump		included
Oil filter	n°	1 - right side
Oil sump		sheet steel / front well
Oil vapours blow-by circuit		on timing cover
Oil heat exchanger		built in the crankcase
Oil filler		on timing cover 1 st cylinder
Exhaust counter flange		included
Starting motor		12 V - 3 kW
Alternator		12 V - 90 A with W contact
Engine stop device		electrical excitation
Wiring harness		-
Power take off (optional) - transmission ratio		1.03 : 1
PTO maximum available torque	SAE A	100 Nm (9 teeth) - 150 Nm (11 teeth)
	SAE B	240 Nm (13 teeth)
Painting	colour	grey

Not included in the standard configuration

Battery - minimum capacity recommended	180 Ah (12V)
Battery - minimum cold cranking capacity recommended	950 A (12 V)

IVECO MOTORS OFFERS THE WIDEST AVAILABILITY OF ENGINE BUILD OPTIONS TO CUSTOMER SPECIFIC REQUIREMENTS WITHIN THE ENGINE SUPPLY. TO FIND OUT MORE ABOUT THE CONFIGURATIONS AND ACCESSORIES WHICH ARE AVAILABLE, CONTACT THE IVECO MOTORS SALES NETWORK.

HEAD OFFICE AND BRANCHES

IVECO S.p.A. Iveco Motors Lungo Stura Lazio, 49 - 10156 Torino Tel. +39 (011) 0076245 - Fax +39 (011) 0076275 www.ivecomotors.com	Italy	IVECO S.p.A. Iveco Motors Viale dell'Industria, 15/17 - 20010 Pregnana Milanese - Milano Tel. +39 (02) 935101 - Fax +39 (02) 93590029	Italy
IVECO FRANCE S.A. Iveco Motors 50 Rue Ampère - B.P. 103 - 69685 Chassieu Cedex Tel. +33 (04) 72472222 - Fax +33 (04) 78905990	France	IVECO N.V. Iveco Motors - Liaison office-India Second Floor - 50, Okhla Industrial Estate - Phase III 110020 New Delhi Tel. +91 11 51613573 - Fax +91 11 26931271	India
IVECO MAGIRUS A.G. Iveco Motors Heiner Fleischmann-Strasse, 9 - 74172 Neckarsulm Tel. +49 (07132) 97690 - Fax +49 (07132) 976935	Germany	IVECO FIAT 10/F Jinling Hotel World Trade Center 2 Hanzhong Road - 210005 Nanjing Tel. +86 25 4710981 - Fax +86 25 4701105	China
IVECO U.K. Ltd Iveco Motors Road One - Industrial Estate CW7 3QP Winsford Tel. +44 (01606) 541027 - Fax +44 (01606) 541124	Great Britain	IVECO LATIN AMERICA Ltda. Iveco Motors Rua Alameda da Serra, 222 Vale do Sereno - 34000 - 000 Nova Lima (MG) Tel. +55 31 3286 3732/33/34 - Fax +55 31 3286 3735	Brazil
IVECO SWEDEN A.B. Iveco Motors Transportgatan, 59 - 42246 Hisings Backa Tel. +46 (31) 492450 - Fax +46 (31) 492457	Sweden	IVECO Motors of N.A. 245 E. North Avenue Carol Stream, IL 60188 - 2021 USA Tel. +1 630 260 4226 - Fax +1 630 260 4267	North America

Local Distributor